


SPECIFICATIONS

General Information

- 0-22.1kw Supported IT Load
- 2134 CFM at 0.1" Static Pressure
- Fail Safe Operation for 100% opening in 15 seconds or less
- Zero Maintenance
- 20 Gauge Steel Construction
- Powder Coat Finish
- Three Temperature Control Points
- Six Vane Automatic Damper Design
- Damper Control Infinitely Variable 0-100%
- User adjustable set point for control
- Tool less roll form stringer attachment
- 23.1"x26.7"x6.2" for use in >12" FFH
- 20W/VA Peak – 6W/VA Typical

REQUIRED COMPONENTS

- DirectAire™
- 4 or 16 unit AC Power Supply
- Concore Bolted Stringer System

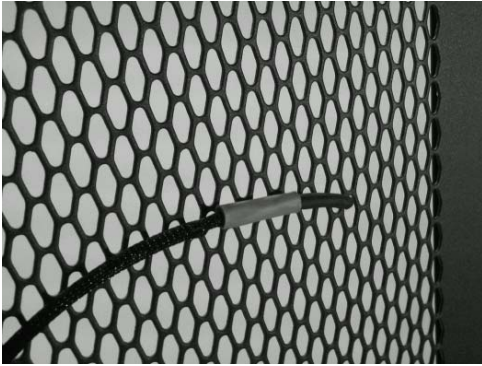

Rack mounted probes to ensure accurate supply temperature



User set point control, display for peak temperature at rack



Heavy Duty Gear Driven Damper Control for high reliability

DirectAire™ Paired with SmartAire™		
Static Pressure	CFM	
	100% Open	Closed
0.02	938	
0.04	1310	
0.05	1502	316
0.06	1666	
0.08	1912	
0.10	2134	543
0.12	2325	
0.14	2531	
0.16	2693	
0.18	2836	
0.20	2991	652